

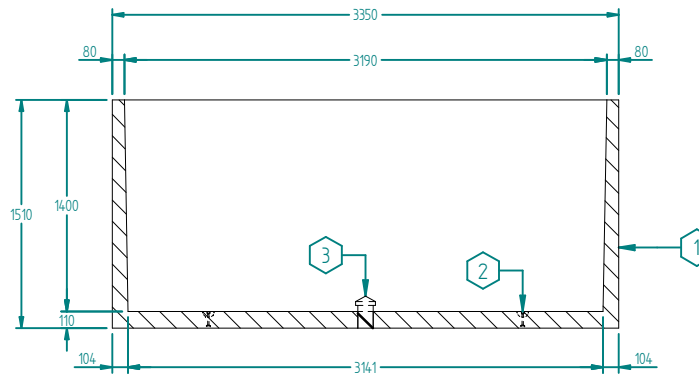


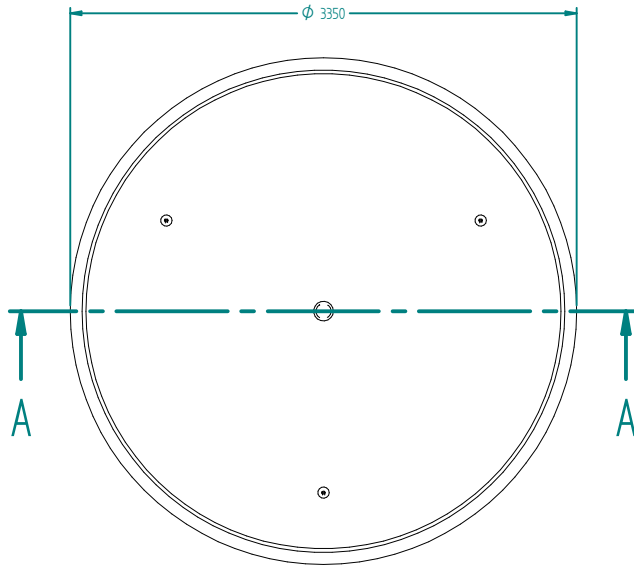

SECTION A-A
1:50

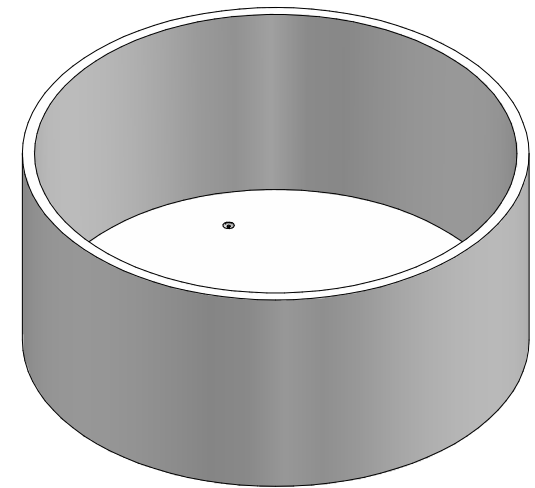

CLASS RATING
STANDARD DUTY

LIVE LOAD LIMITS

< 0.5 tonne Max

DEAD LOAD

0 to 0.5 Metre fill

CONCRETE GRADE

0 to 0.5 Metre fill 40MPa
Exposure Classification B1
AS 3600-2001

TOTAL MASS

Tank = 5,495 Tonnes

LIFTING

SwiftLift Foot Anchor
Tank - 3 x 2.5t x 90mm
SwiftLift Clutches Required

WATER VOLUME

11,075 Litres

TANK BASE NOTES

Bearing capacity of soil
under the tank to be
150 Kpa Minimum

NOTES

Alternative access options
can be manufactured
Enquire with Tanket

No.	Item Code	Qty.	Description
1	T11075BSD	1	11075L SD Concrete Tank Base
2	T2FA090	3	SwiftLift Foot anchors 2.5T x 90mm
3	T605A110	1	Hydrostatic Valve

NEILSEN INDUSTRIES
AUSTRALIA PTY LTD

PLUNGE
pools
DIRECT



TANKET
26, 30 Ramset Drive
Chirnside Park, Victoria, 3116 Australia
Ph: 1300 TANKET / 1300 826 538 - 03 9726 0756
www.tanket.com.au
A Division of Neilsen Industries Australia

			11075 Litre Concrete Tank Standard Duty			
				SCALE	DRG No.	REV
				DATE 29/07/2019	T11075SD	-
No.	DATE	REVISION	DRAWN	W.N.	CHECKED	J. NEILSEN
			SIZE A4			